

Please consult the manufacturer's installation manual for all details and requirements before making a final design layout decision.


GDST4336IFT See-Through Direct Vent Gas Fireplace

				looigii iayo					
MODEL	FRONT	WIDTH	BACK	WIDTH	HEI	GHT	DE	РТН	VIEWING AREA
	Actual	Framing	Actual	Framing	Actual	Framing	Actual	Framing	
GDST4336IFT	42-1/2 [1080}	43 [1092]	42-1/2 [1080}	43 [1092]	38 [965]	38-1/8 [968]	24 [610]	23 [584]	36 x 24-1/2 [914 x 622]
				[1092]	[965] Ø 8" [203]	[968]	[610]		[914 x 622]
38" [965]	24" [610]	34-5/8' [880] 	n				2-1/8" [54] ↓ ↑	•	
	Left Vie	W					→	4-1/8" [105] → Right Vie\	[108]


MINIMUM FIREPLACE CLEARANCES

AREA	TO COMBUSTIBLES
CLEARANCE TO CEILING	31
COMBUSTIBLE/NON-COMBUSTIBLE FLOOR	0
ENDS OF APPLIANCE	1/2
GLASS SIDES OF APPLIANCE	36


APPLIANCE LOCATION

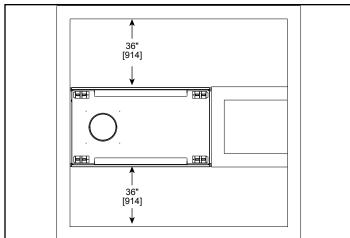


WALL PENETRATION




LEG/WALL PROJECTIONS

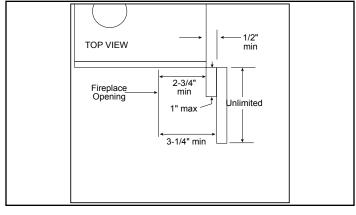


FRAMING DIMENSIONS

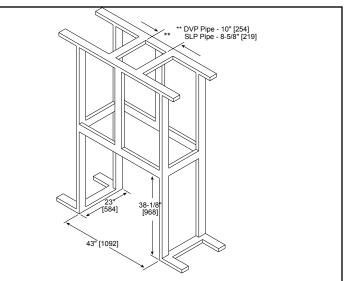

CLEARANCES TO COMBUSTIBLES

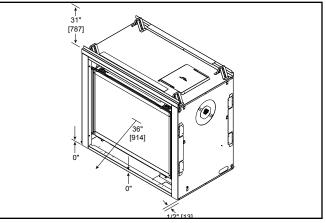

MANTEL PROJECTIONS

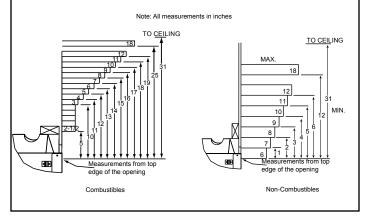

US ANSI Z21.88-2007

US	ANSI Z21.88-2007
CAN	CSA 2.33a-2007
	UL307B

Product information provided is not complete and is subject to change without notice. Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury.

Additional information can be found online at www.heatilator.com



