



Wood-Burning Fireplaces

The Accelerator features meticulous craftsmanship for robust fires and an impressive appearance. Multiple doors and traditional or herringbone brick panels add individual style to the Accelerator's valued performance.

Right: A36R shown with bi-fold doors and traditional refractory Front: A42C shown with gasketed doors and traditional refractory

Features

- 36" or 42" viewing areas
- Radiant or heat-circulating options

Options

Doors

Bi-Fold Doors





(for A36C & A42C only)

Gasketed Doors¹

Vista Doors

Gas Logs




Interiors



Specifications

Accelerator Dimensions

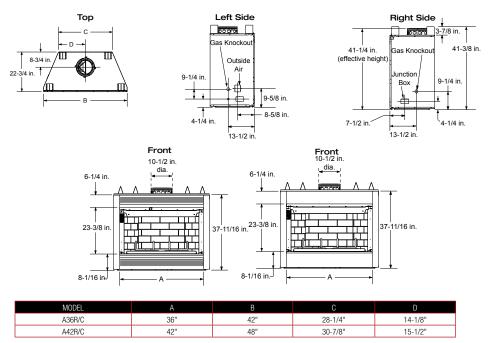

Note: Fireplace header cannot be positioned until after the fireplace assembly is in place. 41-1/2" header height. Use only noncombustible material below the top of the front standoffs. 41-1/2

A36R/C 43"		MODEL	А
A/2B/C /Q"	ſ	A36R/C	43"
45	Γ	A42R/C	49"

For product-specific clearance dimensions, please visit heatilator.com.

Available from

meatilator

The first name in fireplaces

- 800-927-6841 | heatilator.com
- f facebook.com/Heatilator
- 🕒 twitter.com/Heatilator
- 👛 youtube.com/HeatilatorFireplaces

HTL-1022U-0616

Limited Lifetime Warranty²

The strongest in the industry, Heatilator provides a limited lifetime warranty on wood-burning products of the most important aspects: firebox and heat exchanger.

1 Meets 2009 IRC Code

heatilator.com/fireplacesafety.

2 For full warranty details go to heatilator.com.

The information provided in this literature is for planning purposes only and subject to change. Please consult the installation manual for actual installation. Actual product appearance may differ from product images

Fireplace glass and other surfaces get extremely HOT and can cause severe burns if touched. Do not remove the protective safety screen from the front of the glass. Keep a safe distance away. To learn more visit www.







Fireside Gas Logs

Herringbone

Traditional

Framing Dimensions